


RIVI NEXUS RV35

Indoor Wi-Fi 6 (802.11ax) Access Point

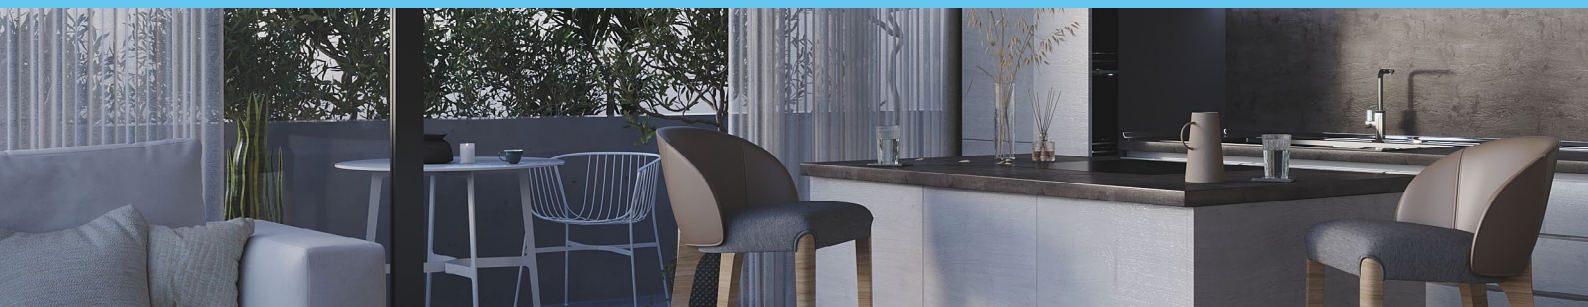

OVERVIEW

Homes face more extreme demands on their wireless infrastructure than ever before.

Whether working out of a home office or streaming films & TV, demand for high-bandwidth applications and content is unrelenting. And they need strong, reliable connectivity. Your network needs to handle the task without missing a beat.

The RIVI RV35 delivers consistent, reliable Wi-Fi 6 (802.11ax) wireless networking at an affordable price. The AP features patented technologies for performance optimisation and interference mitigation found in our premier access points, delivering superior user experiences at extended ranges. But it provides them in an ultra-compact form factor.

Also, wireless requirements within homes are expanding beyond Wi-Fi with BLE, Zigbee and many other non-Wi-Fi wireless technologies resulting in creation of network silos. Homes need a unified platform to eliminate network silos. The RIVI RV35 is equipped to solve these challenges with a USB port supporting an optional pluggable BLE and Zigbee IoT module.

The RV35 Wi-Fi 6 AP incorporates patented technologies in the RIVI Wi-Fi portfolio.

- Extended coverage with BeamFlex utilising multi-directional antenna patterns.
- Improved throughput with ChannelFly®, which dynamically finds less congested Wi-Fi channels to use.

The RV35 provides an ideal combination of features and performance for home environments. Additionally, it supports up to 256 clients and 16 SSIDs per AP.

Whether you're deploying ten or ten thousand APs, the RV35 is easy to manage through RIVI's appliance and virtual management options.



RIVI NEXUS RV35

Indoor Wi-Fi 6 (802.11ax) Access Point

ACCESS POINT ANTENNA PATTERN

BeamFlex+ adaptive antennas allow the RV35 AP to dynamically choose among a host of antenna patterns in real-time to establish the best possible connection with every device.

This leads to:

- Better Wi-Fi coverage
- Reduced RF interference

Traditional omni-directional antennas, found in generic access points, oversaturate the environment by needlessly radiating RF signals in all directions. In contrast, the RIVI BeamFlex+ adaptive antenna directs the radio signals per-device on a packet by-packet basis to optimise Wi-Fi coverage and capacity in real-time to support high device density environments. BeamFlex+ operates without the need for device feedback and hence can benefit even devices using legacy standards.

Figure 1. Example of BeamFlex pattern

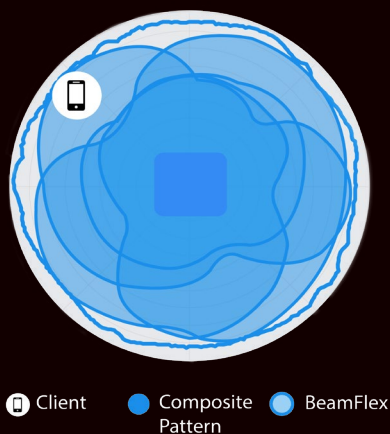


Figure 2. RV35 2.4GHz Azimuth Antenna Patterns



Figure 3. RV35 5GHz Azimuth Antenna Patterns




Figure 4. RV35 2.4GHz Elevation Antenna Patterns





Figure 5. RV35 5GHz Elevation Antenna Patterns



BENEFITS



Latest Wi-Fi Standards

The RV35 access point (AP) support the latest Wi-Fi 6 (802.11ax) technology.



Stunning Wi-Fi Performance

Patented technologies for performance optimisation and interference mitigation delivers extended coverage and superior user experience.



IoT Ready

Eliminate siloed networks and unify Wi-Fi and IoT technologies into one single network with the addition of an optional USB module to allow for the incorporation of any future wireless technologies.



Mesh Networking

Dynamically create self-forming, self-healing network mesh with patented SmartMesh technology reducing expensive cabling, and complex configurations by checking a box.



Affordable Enterprise-grade Performance

The RV35 delivers unprecedented price/performance offering extended range at an affordable price.



Keep Existing Switches and Cables

Designed to operate on existing PoE switches and CAT 5e cabling to minimise costly power infrastructure upgrades.

RIVI NEXUS RV35

Indoor Wi-Fi 6 (802.11ax) Access Point

Wi-Fi	
Wi-Fi Standards	<ul style="list-style-type: none">IEEE 802.11a/b/g/n/ac/ax
Supported Rates	<ul style="list-style-type: none">802.11ax: 4 to 1774 Mbps802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2 for VHT20/40/80)802.11n: 6.5 Mbps to 300 Mbps (MCS0 to MCS15)802.11a/g: 54, 48, 36, 24, 18, 12, 9, 6Mbps802.11b: 11, 5.5, 2 and 1 Mbps
Supported Channels	<ul style="list-style-type: none">2.4GHz: 1-135GHz: 36-64, 100-144, 149-165
MIMO	<ul style="list-style-type: none">2x2 SU-MIMO2x2 MU-MIMO
Spatial Streams	<ul style="list-style-type: none">2 streams SU/MU-MIMO 5GHz2 streams SU/MU-MIMO 2.4GHz
Radio Chains and Streams	<ul style="list-style-type: none">2x2:2 (5 GHz)2x2:2 (2.4GHz)
Channelization	<ul style="list-style-type: none">20, 40, 80MHz
Security	<ul style="list-style-type: none">WPA-PSK, WPA-TKIP, WPA2 , WPA3-Personal, WPA3-Enterprise, AES, WPA3, 802.11i, Dynamic PSKWIPS/WIDS
Other Wi-Fi Features	<ul style="list-style-type: none">WMM, Power Save, Tx Beamforming, LDPC, STBC, 802.11r/k/vHotspotHotspot 2.0Captive PortalWISPr

RF	EV35c	EV35d	EV35se
Antenna Type	<ul style="list-style-type: none">BeamFlex adaptive antennasAdaptive antenna that provides up to 64 unique antenna patterns per band		
Antenna Gain (max)	<ul style="list-style-type: none">Up to 3dBi		
Peak Transmit Power (aggregate across MIMO chains)	<ul style="list-style-type: none">2.4GHz: 23 dBm5GHz: 23 dBm		
Minimum Receive Sensitivity ¹	<ul style="list-style-type: none">-101 dBm		
Frequency Bands	<ul style="list-style-type: none">ISM (2.4-2.484GHz)U-NII-1 (5.15-5.25GHz)U-NII-2A (5.25-5.35GHz)U-NII-2C (5.47-5.725GHz)U-NII-3 (5.725-5.85GHz)		

2.4GHZ RECEIVE SENSITIVITY (dBm)			
HT20		HT40	
MCS0	MCS7	MCS0	MCS7
-94	-70	-91	-72

5GHZ RECEIVE SENSITIVITY (dBm)					
VHT20		VHT40		VHT80	
MCS0	MCS7	MCS0	MCS7	MCS0	MCS7
-95	-76	-92	-73	-89	-70

¹ Rx sensitivity varies by band, channel width and MCS rate.

2.4GHZ TX POWER TARGET	
Rate	Pout (dBm)
MCS0 HT20	20
MCS7 HT20	15

5GHZ TX POWER TARGET	
Rate	Pout (dBm)
MCS0 VHT20	20
MCS7 VHT20	17
MCS0 VHT40,VHT80	17
MCS7 VHT40, VHT80	17

PERFORMANCE AND CAPACITY	
Peak PHY Rates	<ul style="list-style-type: none">2.4GHz: 574Mbps5 GHz: 1200Mbps
Client Capacity	<ul style="list-style-type: none">Up to 256 clients per AP
SSID	<ul style="list-style-type: none">Up to 16 per AP

RADIO MANAGEMENT	
Antenna Optimization	<ul style="list-style-type: none">BeamFlex+Polarization Diversity with Maximal Ratio Combining (PD-MRC)
Wi-Fi Channel Management	<ul style="list-style-type: none">ChannellFlyBackground Scan Based
Client Density Management	<ul style="list-style-type: none">Adaptive Band BalancingClient Load BalancingAirtime FairnessAirtime-based WLAN Prioritization
SmartCast Quality of Service	<ul style="list-style-type: none">QoS-based schedulingDirected MulticastL2/L3/L4 ACLs
Mobility	<ul style="list-style-type: none">SmartRoam
Diagnostic Tools	<ul style="list-style-type: none">SpeedFlex

RIVI NEXUS RV35

Indoor Wi-Fi 6 (802.11ax) Access Point

NETWORKING	
Controller Platform Support	<ul style="list-style-type: none">Unleashed and Cloud
Mesh	<ul style="list-style-type: none">SmartMesh™ wireless meshing technology. Self-healing Mesh
IP	<ul style="list-style-type: none">IPv4, IPv6
VLAN	<ul style="list-style-type: none">802.1Q (1 per BSSID or dynamic per use based on RADIUS)VLAN PoolingPort-based
802.1x	<ul style="list-style-type: none">Authenticator & Supplicant
Tunnel	<ul style="list-style-type: none">L2TP, GRE, Soft-GRE
Policy Management Tools	<ul style="list-style-type: none">Application Recognition and ControlAccess Control ListsDevice FingerprintingRate Limiting

PHYSICAL INTERFACES	
Ethernet	<ul style="list-style-type: none">1 x 1GbE port, RJ-45
USB	<ul style="list-style-type: none">1 USB 2.0 Port, Type A

PHYSICAL CHARACTERISTICS	
Physical Size	<ul style="list-style-type: none">146 mm (W) x 155.9 mm (L) x 39.3 mm (H)5.75 in (W) x 6.14 in (L) x 1.55 in (H)
Weight	<ul style="list-style-type: none">0.368kg (0.81lbs)
Mounting	<ul style="list-style-type: none">Wall, Drop ceiling, DeskSecure bracket (sold separately)
Physical Security	<ul style="list-style-type: none">Hidden latching mechanismT-bar Torx
Operating Temperature	<ul style="list-style-type: none">0 °C (32 °F) to 40 °C (104 °F)
Operating Humidity	<ul style="list-style-type: none">Up to 95%, non-condensing

POWER ³	
Power Supply	Maximum Power Consumption
PoE (Full Functionality)	<ul style="list-style-type: none">12.62W
DC input	<ul style="list-style-type: none">11.4 W

CERTIFICATIONS AND COMPLIANCE	
Wi-Fi Alliance ⁴	<ul style="list-style-type: none">Wi-Fi CERTIFIED™ a, b, g, n, acWi-Fi CERTIFIED 6™WPA3™ -Enterprise, PersonalWi-Fi Enhanced Open™Wi-Fi Agile Multiband™Passpoint[®]VantageWMM
Standards Compliance ⁵	<ul style="list-style-type: none">EN 60950-1 SafetyEN 60601-1-2 MedicalEN 61000-4-2/3/5 ImmunityEN 50121-1 Railway EMCEN 50121-4 Railway ImmunityIEC 61373 Railway Shock & VibrationUL 2043 PlenumEN 62311 Human Safety/RF ExposureWEEE & RoHSISTA 2A Transportation

SOFTWARE AND SERVICES	
Location Based Services	<ul style="list-style-type: none">SPoT
Network Analytics	<ul style="list-style-type: none">SmartCell Insight (SCI)
Security and Policy	<ul style="list-style-type: none">Cloudpath

ORDERING INFORMATION	
RIV-RV35-UNL	<ul style="list-style-type: none">RV35 dual-band (5GHz and 2.4GHz concurrent) 802.11ax indoor wireless access point, 2x2:2 + 2x2:2 streams, adaptive antennas, dual ports, PoE support, Unleashed managed, Plenum rated. Includes adjustable acoustic drop ceiling bracket. Does not include power adapter (available separately).
RIV-RV35-CLD	<ul style="list-style-type: none">RV35 dual-band (5GHz and 2.4GHz concurrent) 802.11ax indoor wireless access point, 2x2:2 + 2x2:2 streams, adaptive antennas, dual ports, PoE support, Remote management (3 years hosted), Plenum rated. Includes adjustable acoustic drop ceiling bracket. Does not include power adapter (available separately).

CLOUD/ REMOTE MANAGEMENT LICENCE RENEWALS	
CLD-1-YR-RENEW	<ul style="list-style-type: none">1 year hosted remote management licence renewal, per AP
CLD-3-YR-RENEW	<ul style="list-style-type: none">3 year hosted remote management licence renewal, per AP

³ Max power varies by country setting, band, and MCS rate.⁴ For complete list of WFA certifications, please see the Wi-Fi Alliance website.⁵ For current certification status, please see the price list.